

FORMA 800 TUNNEL

WITH PRIME FIRE 590 AUTOMATIC BEV[®] BURNER

Net Zero fireplace with the BEV Technology[®]

AUTOMATIC BEV[®] BURNER

The automatic burner with the patented BEV Technology[®] is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapours and has no direct contact with the liquid fuel.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fireplace housing with combustible materials.



AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spilling the fuel.

INTEGRATED CONTROL PANEL

The burner has an intuitive control panel and inlet for automatic refuelling.

FLAME CONTROL

Have control over the fire. Choose ECO mode for smaller, ambient flame or increase the height to experience the full beauty of fire.

TRUE ZERO CLEARANCE

The feature that allows you install the fireplace in a housing construction made of combustible materials.

REMOTE CONTROL

Take full control over the fireplace with the intuitive and minimalistic remote in your hand.



BEST BUILD QUALITY

The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

Forma 800 Tunnel

Burner model	Prime Fire 590 (BEV Technology [®])
Fuel tank capacity	3.1 L
Maximum burn time	6 hours
Maximum heat output	3.1 kW
Minimum room cubature	31 m ³
Flame height regulation	2 stages
Weight	58.7 kg
Fuel type	bioethanol 95 - 96,6%
Flue	not required
Air change rate	1 space volume per hour
Power supply	230 V
Finish	black powder coating
Materials	steel, galvanized steel, toughened glass
Application	for indoor use only


CONTROL OPTIONS



included


OPTIONAL DECORATIVE TRAY

Decorative tray with 1 ceramic log or white stones installed on the burner, behind the fireline.



O-TL certified 

Manufactured to UL standards

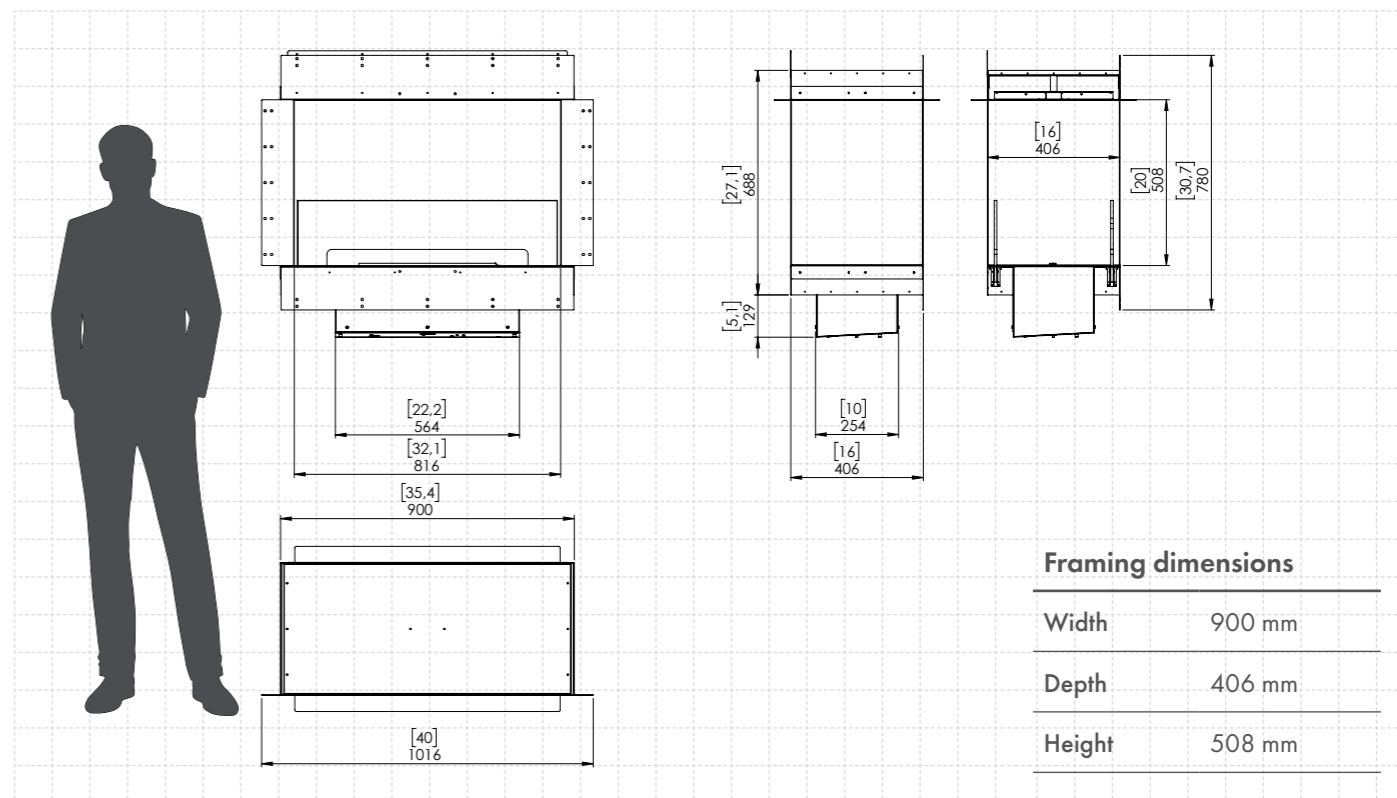

All product specifications and data are subject to change without notice and are believed to be accurate as of the date hereof. Planika Sp. z o.o., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Planika Sp. z o.o."), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any document or in any other disclosure relating to any product. To the maximum extent permitted by applicable law, Planika Sp. z o.o. disclaims any and all liability arising out of the application or use of any product. This document does not expand or otherwise modify Planika Sp. z o.o.'s terms and conditions of purchase, including but not limited to the warranty expressed therein. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Planika Sp. z o.o.. Customers using or selling Planika Sp. z o.o.'s products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Planika Sp. z o.o. for any damages arising or resulting from such use or sale. The images are indicative only.

All product specifications and data are subject to change without notice and are believed to be accurate as of the date hereof. Planika Sp. z o.o., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Planika Sp. z o.o."), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any document or in any other disclosure relating to any product. To the maximum extent permitted by applicable law, Planika Sp. z o.o. disclaims any and all liability arising out of the application or use of any product. This document does not expand or otherwise modify Planika Sp. z o.o.'s terms and conditions of purchase, including but not limited to the warranty expressed therein. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Planika Sp. z o.o.. Customers using or selling Planika Sp. z o.o.'s products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Planika Sp. z o.o. for any damages arising or resulting from such use or sale. The images are indicative only.

FORMA 1000 TUNNEL

WITH PRIME FIRE 790 AUTOMATIC BEV[®] BURNER

Net Zero fireplace with the BEV Technology[®]

AUTOMATIC BEV[®] BURNER

The automatic burner with the patented BEV Technology[®] is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapours and has no direct contact with the liquid fuel.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fireplace housing with combustible materials.



AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spilling the fuel.

INTEGRATED CONTROL PANEL

The burner has an intuitive control panel and inlet for automatic refuelling.

FLAME CONTROL

Have control over the fire. Choose ECO mode for smaller, ambient flame or increase the height to experience the full beauty of fire.

TRUE ZERO CLEARANCE

The feature that allows you install the fireplace in a housing construction made of combustible materials.

REMOTE CONTROL

Take full control over the fireplace with the intuitive and minimalistic remote in your hand.



BEST BUILD QUALITY

The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

Forma 1000 Tunnel

Burner model	Prime Fire 790 (BEV Technology [®])
Fuel tank capacity	4.3 L
Maximum burn time	9 hours
Maximum heat output	4.4 kW
Minimum room cubature	44 m ³
Flame height regulation	2 stages
Weight	62.9 kg
Fuel type	bioethanol 95 - 96,6%
Flue	not required
Air change rate	1 space volume per hour
Power supply	230 V
Finish	black powder coating
Materials	steel, galvanized steel, toughened glass
Application	for indoor use only


CONTROL OPTIONS



included


OPTIONAL DECORATIVE TRAY

Decorative tray with 1 ceramic log or white stones installed on the burner, behind the fireline.



O-TL certified 

Manufactured to UL standards

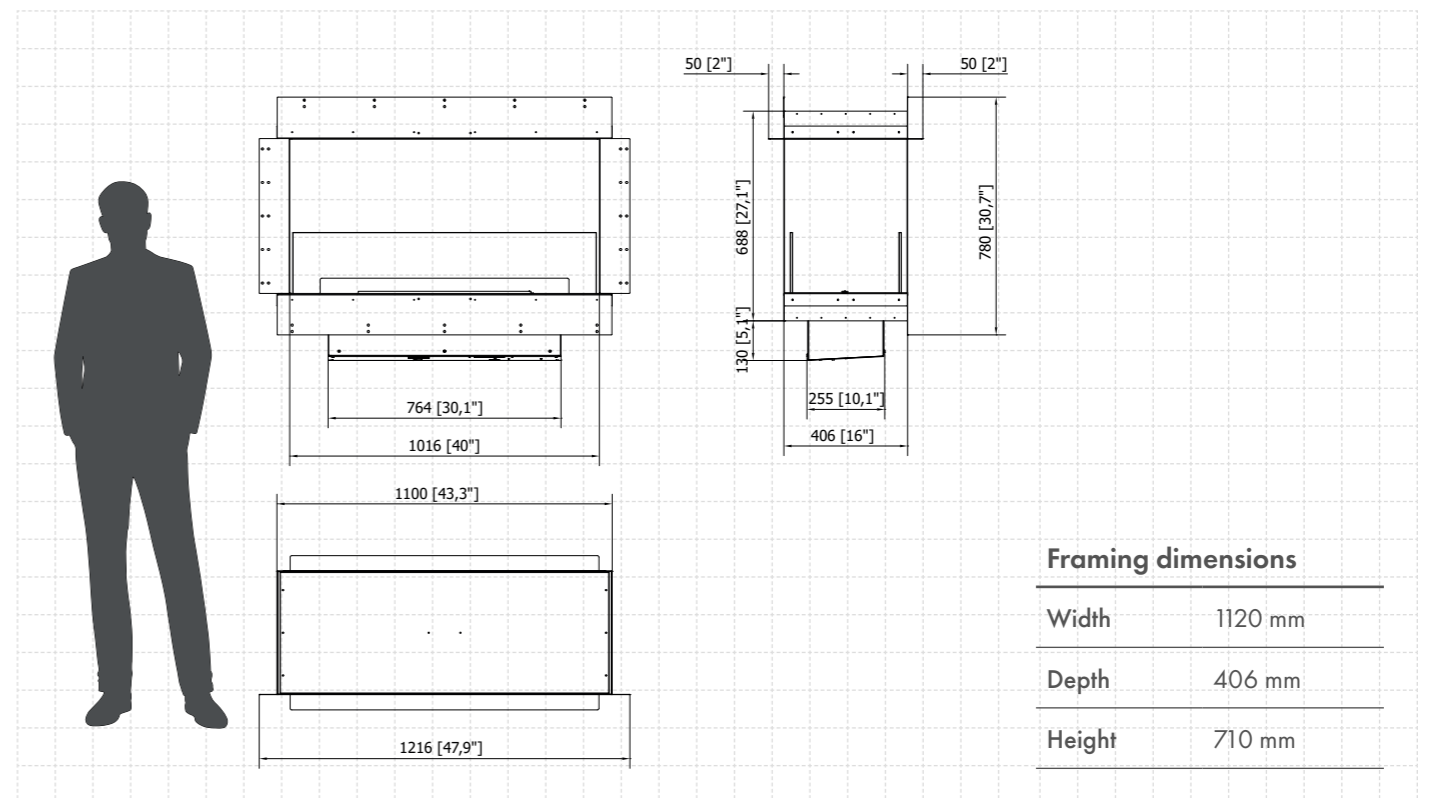

FORMA 1200 TUNNEL

WITH PRIME FIRE 990+ AUTOMATIC ETHANOL BURNER

Net Zero fireplace with the BEV Technology®

TUNNEL FIREPLACE

The fireplace allows to keep the visual connection between spaces and provides natural flames in two rooms with only one fireplace.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fireplace housing with combustible materials.

O-TL BEST BUILD QUALITY

The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

TRUE ZERO CLEARANCE

The feature that allows you install the fireplace in a housing construction made of combustible materials.



INTEGRATED CONTROL PANEL

The burner has an intuitive control panel and inlet for automatic refuelling.

AUTOMATIC PRIME FIRE BURNER

The automatic burner with the patented BEV Technology® is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapours and has no direct contact with the liquid fuel.

REMOTE CONTROL

Take full control over the fireplace with the intuitive and minimalistic remote in your hand.

TECHNICAL GLASS PANEL

The dedicated toughened glass plate covers the flame making it stable and even.

Forma 1200 Tunnel

Burner model	Prime Fire 990+ (BEV Technology®)
Fuel tank capacity	5.5 L
Maximum burn time	10 hours
Maximum heat output	7.0 kW
Minimum room cubature	70 m ³
Flame height regulation	2 stages
Weight	73.4 kg
Fuel type	bioethanol 95 - 96,6%
Flue	not required
Air change rate	1 space volume per hour
Power supply	230 V
Finish	black powder coating
Materials	steel, galvanized steel, toughened glass
Application	for indoor use only


CONTROL OPTIONS




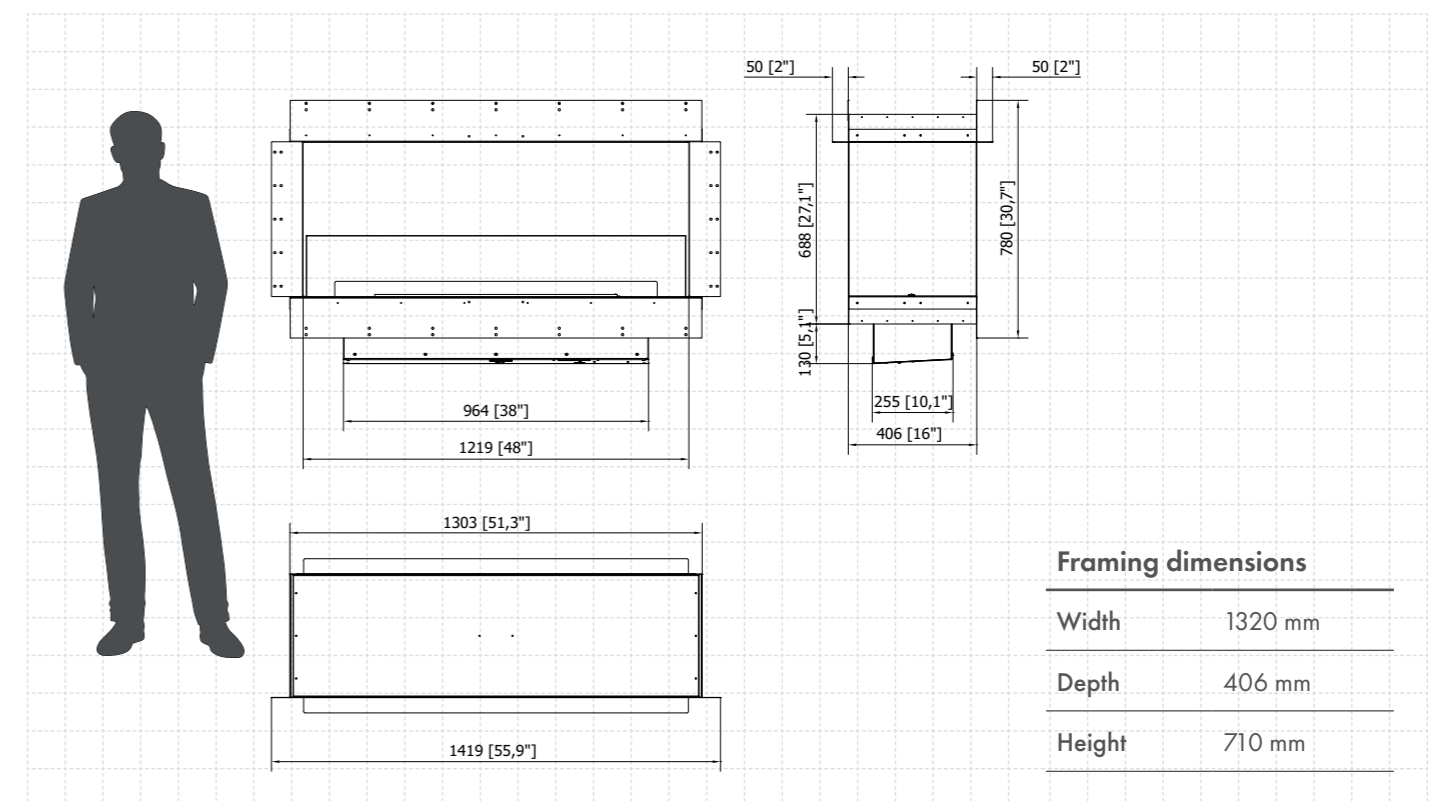
included

OPTIONAL DECORATIVE TRAY

Decorative tray with 2 ceramic logs or white stones installed on the burner, behind the fireline.



O-TL certified 
Manufactured to UL standards



FORMA 1500 TUNNEL

WITH PRIME FIRE 1190 AUTOMATIC BEV® BURNER

Net Zero fireplace with the BEV Technology®

AUTOMATIC BEV® BURNER

The automatic burner with the patented BEV Technology® is the most advanced product in the industry ensuring the cleanest burning process without any smoke, smell or ash. The flame is produced by combusting ethanol vapours and has no direct contact with the liquid fuel.

PROTECTIVE DEFLECTOR

With the attached deflector you can cover the fireplace housing with combustible materials.



AUTOMATIC REFILLING SYSTEM

The automatic pump communicates with the device, delivering the necessary amount of fuel. There is no risk of overfilling the tank or spilling the fuel.

INTEGRATED CONTROL PANEL

The burner has an intuitive control panel and inlet for automatic refuelling.

FLAME CONTROL

Have control over the fire. Choose ECO mode for smaller, ambient flame or increase the height to experience the full beauty of fire.

TRUE ZERO CLEARANCE

The feature that allows you install the fireplace in a housing construction made of combustible materials.

REMOTE CONTROL

Take full control over the fireplace with the intuitive and minimalistic remote in your hand.



BEST BUILD QUALITY

The product passed extensive tests carried out by the leading certification institutes. It is manufactured according to UL standards and is O-TL certified, meeting the most demanding safety and quality requirements.

Forma 1500 Tunnel

Burner model	Prime Fire 1190 (BEV Technology®)
Fuel tank capacity	6.8 L
Maximum burn time	11 hours
Maximum heat output	9.4 kW
Minimum room cubature	94 m ³
Flame height regulation	2 stages
Weight	86.4 kg
Fuel type	bioethanol 95 - 96,6%
Flue	not required
Air change rate	1 space volume per hour
Power supply	230 V
Finish	black powder coating
Materials	steel, galvanized steel, toughened glass
Application	for indoor use only


CONTROL OPTIONS



included

OPTIONAL DECORATIVE TRAY

Decorative tray with 2 ceramic logs or white stones installed on the burner, behind the fireline.



O-TL certified 

Manufactured to UL standards

